


BELPA® CSA-90

PREMIUM QUALITY COMPRESSED SHEETS FOR GASKETS

COMPOSITION

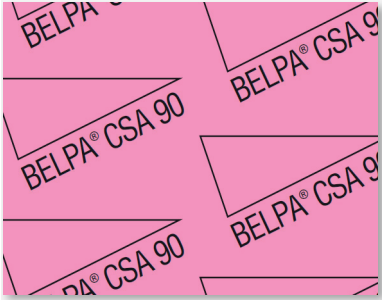

BELPA® CSA 90 is a premium quality compressed sheets for gaskets made of mineral fibre, aramide and dispersed inorganic loads mixed in a matrix of high quality type NBR rubber.

This material has got high compressibility, good tensile strength and low gas permeability, excellent characteristics for many industrial services, where the high demand of resistance to temperature and pressure must be combined (GRADO X: BS 7531). It also available with steel wire reinforcement and anti-stick coating. **REF. BELPA® CSA 90 M/G.**

BELPA® CSA 90 is manufactured according to circularity and sustainability models and processes, thus obtaining a RECYCLED and RECYCLABLE (R&R) material.

TECHNICAL DATA

| | |
|---|-------------------------------|
| Standard sizes (mm). Other upon request | 1500x1500 |
| Standard thickness (mm). Other upon request | 0.5; 0.8; 1.0; 1.5; 2.0; 3.0; |
| Density (+/-10%) | 1.65 g/cm ³ |
| Compressibility ASTM F-36 A | 7% - 15% |
| Recovery ASTM F-36 A | >55% |
| Transverse tensile strength ASTM F-152 | 12 MPa |
| Residual stress BS 7531 | 25 MPa |
| Gas permeability DIN 3535/6 | <1 cm ³ /min |
| THICKNESS INCREASE ASTM F-146 | |
| Immersion in ASTM oil No3 for 5h at 150oC | <3% |
| Immersion in ASTM fuel B 5h 20°C | <7% |

* Typical properties for 2 mm thickness.

CERTIFICATION


DVGW (DIN 3535-6)

DVGW (VP-401 HIGH TEMPERATURES)

WRAS (BS 6920 DRINKING WATER)

ROHS (D.U.E 2015/863-2011/65)

PRESSURE - TEMPERATURE DIAGRAM

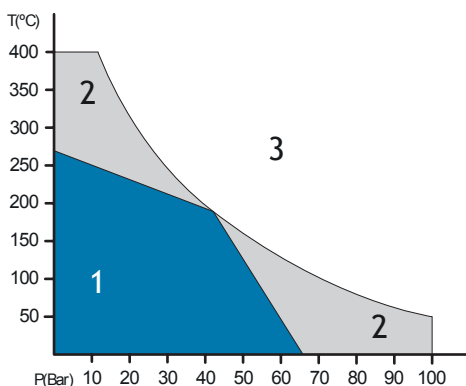

P-T OPERATING GUIDELINES:

- 1- Usually satisfactory to use without reference to Montero. Technical examination is normally unnecessary.
- 2- Must refer to Montero for advice. A technical examination is recommended.
- 3- Area not recommended.

The P-T diagram helps the user or designer who often knows the operating temperature and pressure to carry out an initial selection of a suitable material. The P-T diagram cannot guarantee the suitability of a material for an application.

Good performance and long service life of gaskets depend in large measure on fitting and operation conditions, over which the manufacturer has no control. The data given on this technical sheet should not be used as application limits, but as guidance for an appropriate choice. We can offer guarantees only for the quality of our products.