

COMPOSITION:

Premium quality compressed sheets for gaskets made of mineral fibre, aramide and dispersed inorganic loads mixed in a matrix of high quality type NBR rubber.

BELPA® CSA-520 has the lowest gas permeability value, with the highest tensile strength and the best flexibility. BELPA® CSA-520 is a high-tech product with the highest stress relaxation value (GRADE X) in the market. Material suitable for many uses and with most of the fluids. TA-LUFT VDI 2440 approval (lowest leakage at 250°C). Universal gasket material for every equipment and services.



TECHNICAL DATA

Standard sizes (mm). Other upon request	1500 x 1500
Standard thickness (mm). Other upon request	0.5; 0.8; 1.0; 1.5; 2.0; 3.0
Density (+/-10%)	1.80 g/ cm ³
Compressibility ASTM F-36 A	7% - 15%
Recovery ASTM F-36 A	>55%
Transverse tensile strength ASTM F-152	13 MPa
Gas permeability DIN 3535/6	<1 cm ³ /min
THICKNESS INCREASE ASTM F-146	
ASTM oil N°3 5h 150°C	<6%
ASTM fuel B 5h 20°C	<8%

* Typical properties for 2 mm thickness.

CERTIFICATIONS


DVGW (DIN 3535-6 gas)

WRAS (BS6920 drinking water)

TZW (KTW drinking water)

TA LUFT (VDI 2440 lowest leakage at 250°)

PRESSURE - TEMPERATURE DIAGRAM

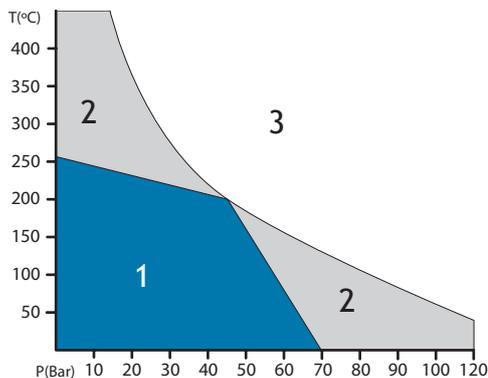

P-T OPERATING GUIDELINES:

- 1- Usually satisfactory to use without reference to Montero. Technical examination is normally unnecessary.
- 2- Must refer to Montero for advice. A technical examination is recommended.
- 3- Area not recommended.

The P-T diagram helps the user or designer who often knows the operating temperature and pressure to carry out an initial selection of a suitable material. The P-T diagram cannot guarantee the suitability of a material for an application.

Good performance and long service life of gaskets depend in large measure on fitting and operation conditions, over which the manufacturer has no control. The data given on this technical sheet should not be used as application limits, but as guidance for an appropriate choice. We can offer guarantees only for the quality of our products.